



REV.	ECN NO OR DESCRIPTION	REVISED	DATE

SPECIFICATIONS:


1. ELECTRICAL CHARACTERISTICS

- 1-1. CONTACT RESISTANCE: 80 milliohms MAX.
- 1-2. INSULATION RESISTANCE: 1,000 Megohms MIN.
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS






- 2-1. RETENTION FORCE: MIN. 100gf/PIN
- 2-2. DURABILITY: 5,000 CYCLES
- 3. RoHS 2002/95/EC COMPLIANT.

PIN NO.	NAME	TYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DATO	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

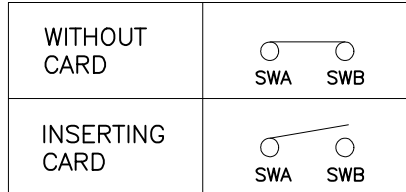


NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
E	SW-B	1	STAINLESS STEEL	Ni/Au PLATING
D	SW-A	1	COPPER ALLOY	Ni/Au PLATING
C	SHELL-A	1	STAINLESS STEEL	Ni/Au PLATING
B	CONTACT	8	COPPER ALLOY	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD			
DECIMALS:		TITLE			
X : ±0.5	ANGLES:	T-FCARD CONN SMT 9P 1.32H			
X.X : ±0.30	X : ±2°	DWN	xiong	TF-020	
X.XX : ±0.20	X.X : ±1°	CHKD	lee	SCALE: 1:1	UNIT: mm
		APVD	wang	SIZE: A4	SHEET: 10F 1
		REV: A4			
CUSTOMER COPY					

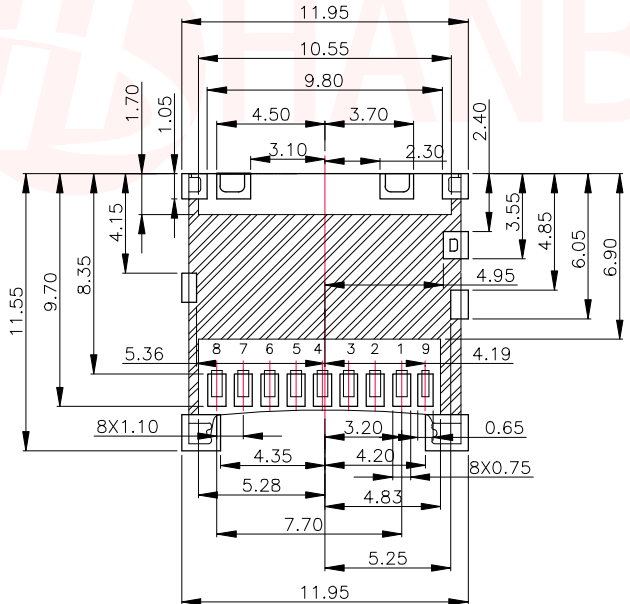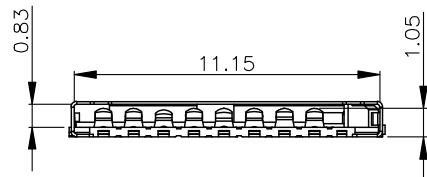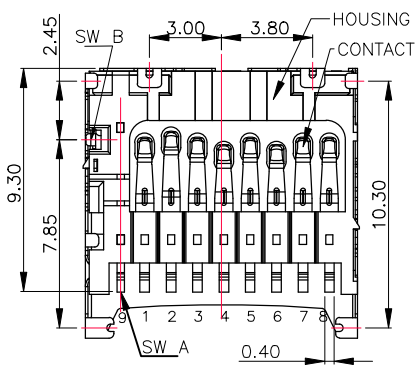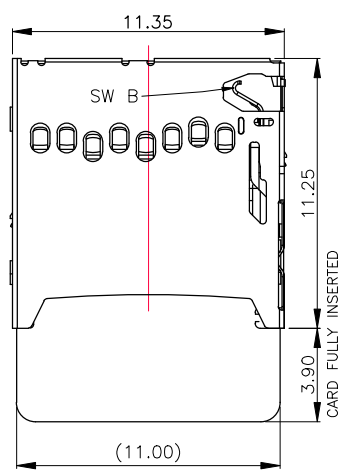

RECOMMENDED P.C.B HOLE LAYOUT COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

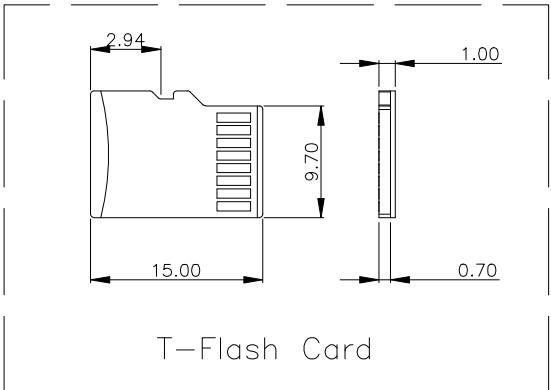

T-Flash Card