






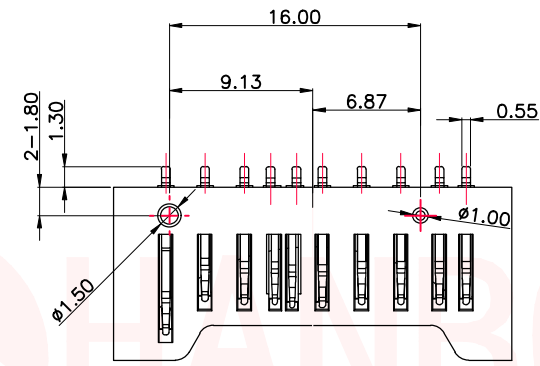


REV.	ECN NO OR DESCRIPTION	REVISED	DATE

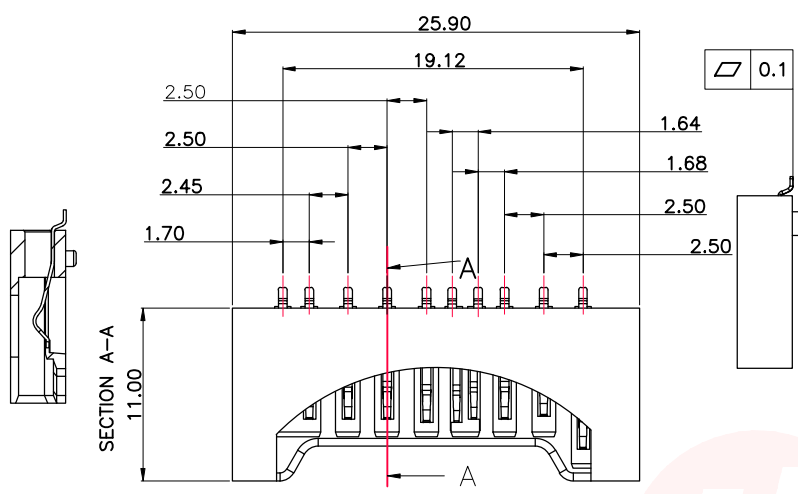

- Notes:
- 1.All Dimensions are in Millimeters.
 - 2.Operation voltage: 100 VAC max.
 - 3.Current rating : 1 Amps max.
 - 4.Contact resistance: 100m ohms max.
 - 5.Insulation resistance: 1000M ohms min. 500 VDC
 - 6.Dielectric withstanding voltage: 500 VAC / 1minute
 - 7.Operating Temperature: -40°C to +85°C
 - 8.Storage Temperature: -40°C to +85°C
 - 9.Material see table.
 10. Total Mating Force : 40N (MAX) at 25 mm/minute
 - 11.Total Unmating Force: 2N (MIN) at 25 mm/minute

PIN#	NAME	DESCRIPTION
1	DAT3	DATA LINE BIT3
2	CMD	COMMAND/RESPONSE
3	VSS1	SUPPLY VOLTAGE GROUND
4	VDD1	SUPPLY VOLTAGE
5	CLK	CLOCK
6	VSS2	SUPPLY VOLTAGE GROUND
7	DAT0	DATA LINE BIT0
8	DAT1	DATA LINE BIT1
9	DAT2	DATA LINE BIT2

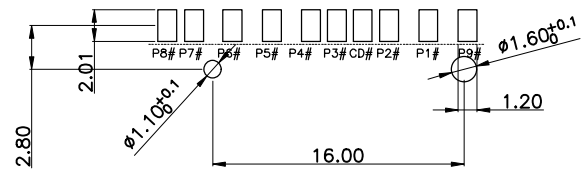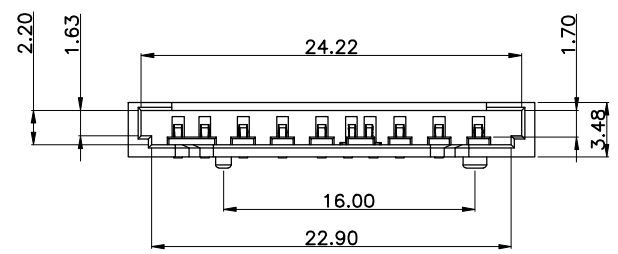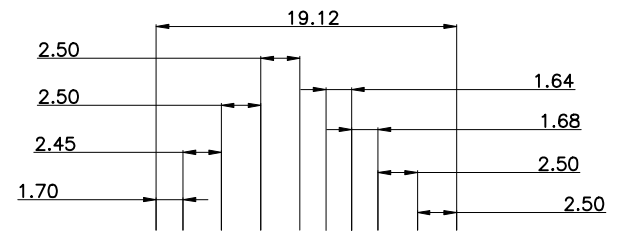

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:
 X :±0.5 X :±2°
 X.X :±0.20 X.X :±1°
 X.XX :±0.10

东莞市汉博电子科技有限公司
 DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	SD CARD CONN全塑短体正向型		
DWN	xiong	PART NO. SD-116	
CHKD	lee	SCALE:1:1	UNIT: mm
APVD	wang	SIZE: A4	SHEET:10F 1
			REV: A4

CUSTOMER COPY