

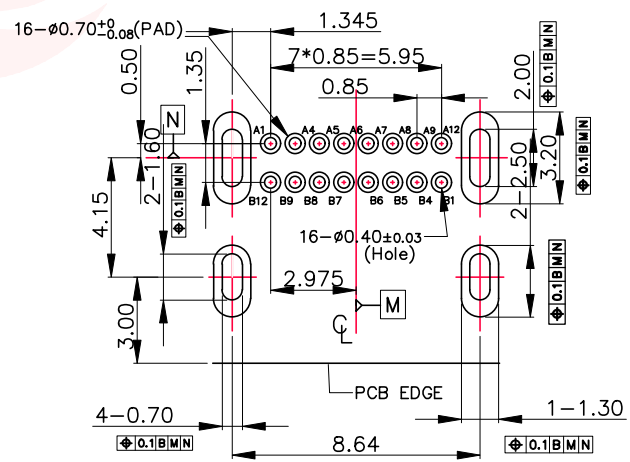
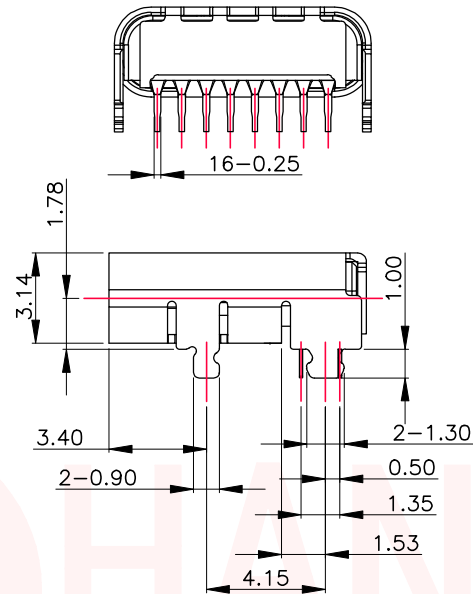





REV.	ECN NO OR DESCRIPTION	REVISED	DATE



RECOMMENDED P.C.B LAYOUT
 GENERAL TOLERANCE: ±0.05
 PCB TOP SURFACE

- 备注:
- 1.材质:
 - 1.1胶芯: LCP+30%G.F
 - 1.2端子: C1814, T=0.12mm; 镀半金锡
 - 1.3外壳: 不锈钢, T=0.30mm; 表面镀镍
 - 1.4卡片: 不锈钢, T=0.15mm;
 - 2.主要特性:
 - 2.1额定电流: 3.0A
 - 2.2接触阻抗: 40mΩ MAX
 - 2.3绝缘阻抗: 100MΩ MIN 250V DC
 - 2.4耐压测试: 100V AC
 - 2.5沾锡性: 温度245±5℃, 时间5±0.5s
 - 2.6整体插入力: 2.0kgf MAX
整体拔出力: 0.8kgf MIN
耐久后拔出力: 0.6kgf MIN
 - 2.7使用寿命: 10000次
 - 2.8工作温度: -25℃~+80℃

PIN ASSIGNMENT:

Pin No.	Signal Name	Pin No.	Signal Name
A1	CND	B12	CND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	CND	B1	CND

UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD			
DECIMALS:	ANGLES:	TITLE	USB TYPE -C/F POWER 16PIN DIP ONL Y CH=1.78,L=8.97		
X :±0.30	X :±2°	DWN	xiong	PART NO. MC-123	
X.X :±0.20	X.X :±1°	CHKD	lee	SCALE:1:1	UNIT: mm
X.XX :±0.10		APVD	wang	SIZE: A4	SHEET:10F 1
		REV: A4			
CUSTOMER COPY					